

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number
WO 2004/113770 A2

(51) International Patent Classification⁷: **F16J**
(21) International Application Number:
PCT/US2004/019496
(22) International Filing Date: 18 June 2004 (18.06.2004)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
60/480,394 20 June 2003 (20.06.2003) US

(71) Applicant (for all designated States except US): **ELLIOTT COMPANY** [US/US]; 901 North Fourth Street, Jeannette, PA 15644-1473 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LI, Jiming** [CN/US]; 140 Monticello Drive, Monroeville, PA 15146 (US). **DE CHOUDHURY, Pranabesh** [US/US]; 1354 Conway Street, Greensburg, PA 15601 (US).

(74) Agents: **BYRNE, Richard, L.** et al.; Webb Ziesenheim Logsdon Orkin & Hanson, 700 Koppers Building, 436 Seventh Avenue, Pittsburgh, PA 15219-1818 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **SWIRL-REVERSAL ABRADABLE LABYRINTH SEAL**

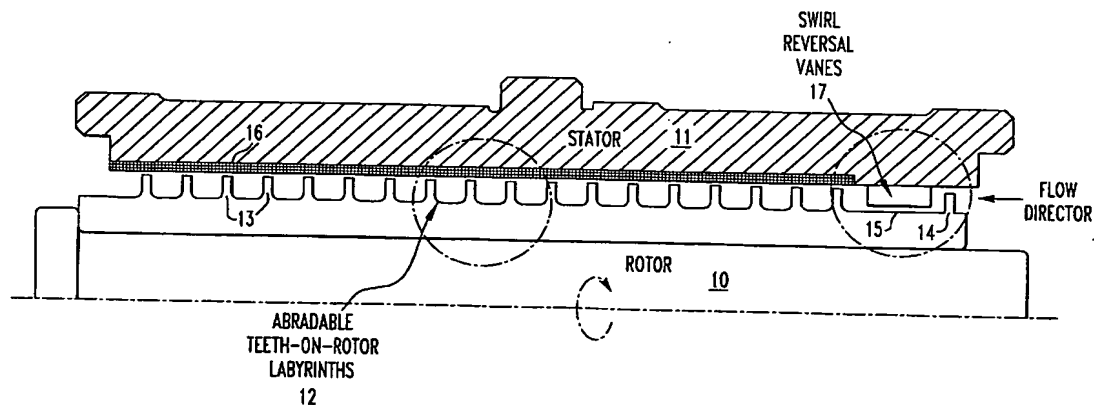

(57) Abstract: An apparatus for restricting axial flow through the clearance between a rotating shaft and a seal stator comprises an abradable labyrinth seal and swirl-reversal vanes upstream of the labyrinth seal. The shaft comprises a first toothed axial section having a plurality of annular teeth, a second upstream toothed axial section having a few annular teeth from one to three, and a section therebetween having a cylindrical surface of diameter less than the outer edge of the teeth of the toothed sections, the swirl-reversing vanes being fastened to the stator seal between the toothed sections.

WO 2004/113770 A2